

C-LIO-1SN05-1,8M-DIN4-GPN.R001



Mechanical Features


- * Compact wall plug-in housing
- * Output plug Mini-Din 4 pole
- * Protection Class 2
- * Changeable input plug for worldwide use
- * For indoor use only

Battery


- * Lithium Ion 1 cell
- * Thermistor 10k $\beta=3980$ to batt. Neg.

Charge profile


- * Manufacturer recommended CC/CV
- * Low voltage / temperature Precharge
- * Topoff mode
- * Safety timers
- * Temperature monitoring

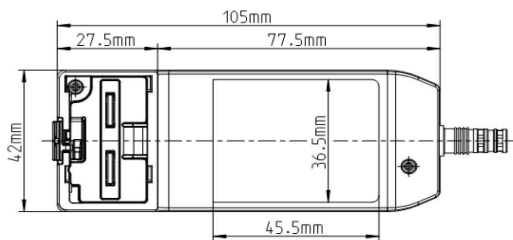

State of charge	LED
Charge pending	Amber
Precharge	Amber 0,5s on 0,5s off
Rapid charge	Green 0,5s on 0,5s off
Charge finished & toff	Green
Fault	Red

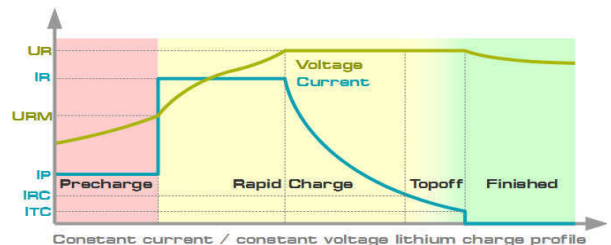

Pin Layout
Pin 1: NTC
Pin 2: Plus
Pin 3: GND
Pin 4: not connected



Specifications

Dimensions	
Wall Plug In Housing (without plug)	105 x 42 x 37 mm
Input Parameters	
Input voltage	90 - 264 V
Input current	9 - 620 mA
Input frequency	47 - 63 Hz
Efficiency	typ. 87%
Output Parameters	
Output power	max 12 W
Output voltage	min. 4,11V max. 4,19V
Output current	min. 0,15A max. 0,55A
Environmental	
Operating temperature	min. 0°C max. 40°C
Storage temperature	min. -30°C max. 80°C
Humidity	max. 95%

The data in this datasheet document are for information and descriptive purposes only and are not to make or imply any guarantee or warranty.

No guarantee for zero failure status of given information inside this document. Please see/request detailed specification for finally valid data.

Fey Elektronik GmbH, Storchenweg 3, 21217 Seevetal, Germany, info@feyelektronik.de, Tel.: +49 (0)40-703-8888-0

Date: 04.06.2014

