

Mechanical Features


- * Compact wall plug-in housing
- * Output plug Mini-Din 4 pole
- * Protection Class 2
- * Changeable input plug for worldwide use
- * For indoor use only

Battery


- * Lithium Ion 4 cell
- * Thermistor 10k $\beta=3980$ to batt. Neg.

Charge profile


- * Manufacturer recommended CC/CV
- * Low voltage / temperature Precharge
- * Topoff mode
- * Safety timers
- * Temperature monitoring

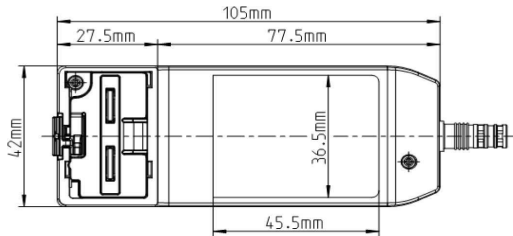

State of charge	LED
Charge pending	Amber
Precharge	Amber 0,5s on 0,5s off
Rapid charge	Green 0,5s on 0,5s off
Charge finished & toff	Green
Fault	Red

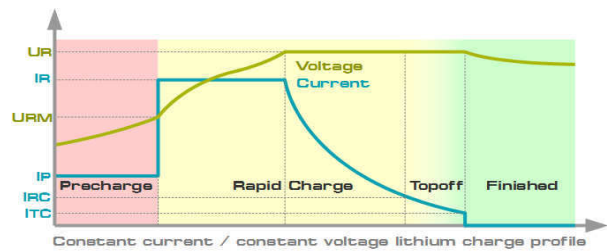

Pin Layout
Pin 1: Plus
Pin 2: not connected
Pin 3: NTC
Pin 4: GND



Specifications

Dimensions		
Wall Plug In Housing (without plug)	105 x 42 x 37 mm	
Input Parameters		
Input voltage	90 - 264 V	
Input current	9 - 620 mA	
Input frequency	47 - 63 Hz	
Efficiency	typ. 87%	
Output Parameters		
Output power	max 24 W	
Output voltage	min. 16,44V	max. 16,77V
Output current	min. 0,81A	max. 0,99A
Environmental		
Operating temperature	min. 0°C	max. 40°C
Storage temperature	min. -30°C	max. 80°C
Humidity	max. 95%	

The data in this datasheet document are for information and descriptive purposes only and are not to make or imply any guarantee or warranty. No guarantee for zero failure status of given information inside this document. Please see/request detailed specification for finally valid data. Fey Elektronik GmbH, Storchenweg 3, 21217 Seevetal, Germany, info@feyelektronik.de, Tel.: +49 (0)40-703-8888-0

