


CGA103450A: Prismatic Model

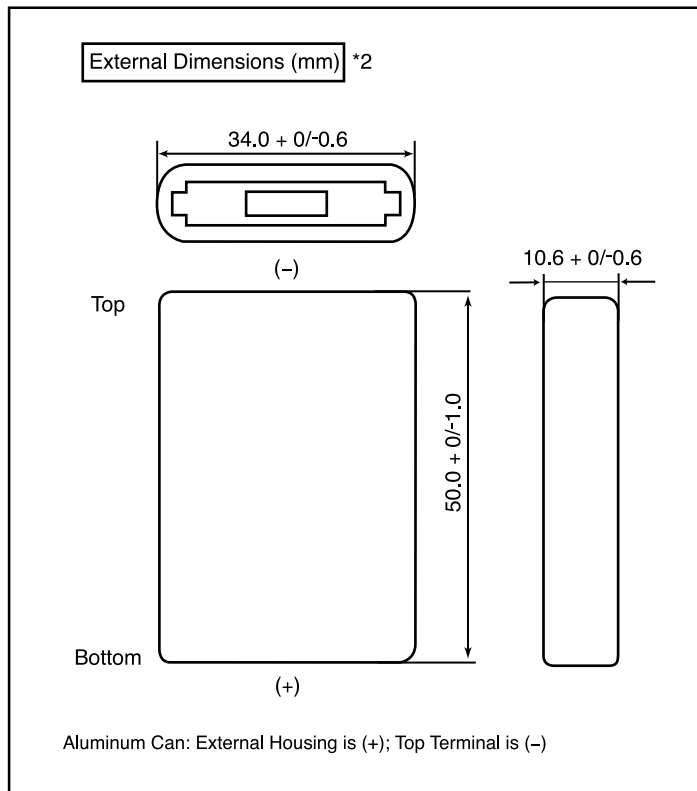

To ensure safety, the referenced Li-ion cell is not sold as a bare cell. Li-ion cells must be integrated with the appropriate safety circuitry via an authorized Panasonic Li-ion pack assembler.



Specifications

<b>Nominal Voltage</b>		3.7 V
<b>Standard Capacity<sup>*1</sup></b>		1950mAh
<b>Dimensions<sup>*2</sup></b>	<b>Width</b>	34.0 + 0/-0.6mm
	<b>Height</b>	50.0 + 0/-1.0mm
	<b>Thickness</b>	10.6 + 0/-0.6mm
	<b>Weight</b>	Approx. 39g


\*1 After a fresh battery has been charged at constant voltage/constant current (4.2 V, 1200 mA (max), 2 hours, 20°C), the average of the capacity (ending voltage of 3 V at 20°C) that is discharged at a standard current (370 mA).

\*2 Dimensions of a fresh battery

Discharge Characteristics

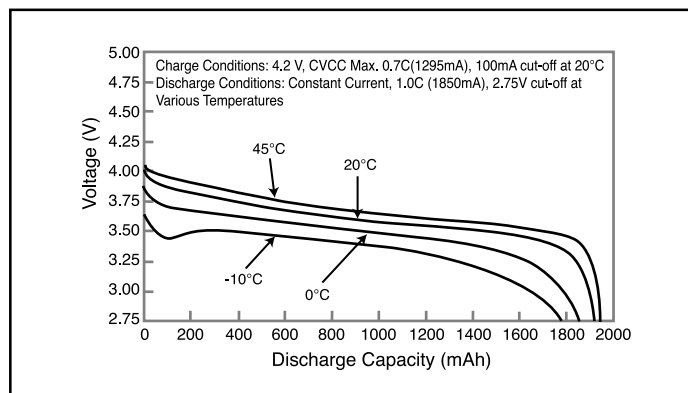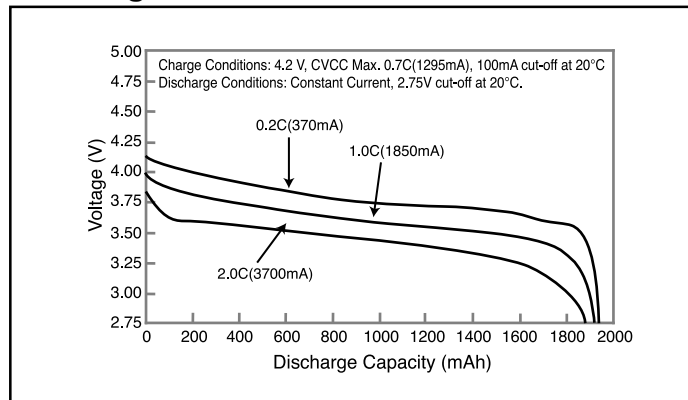

Charge Characteristics

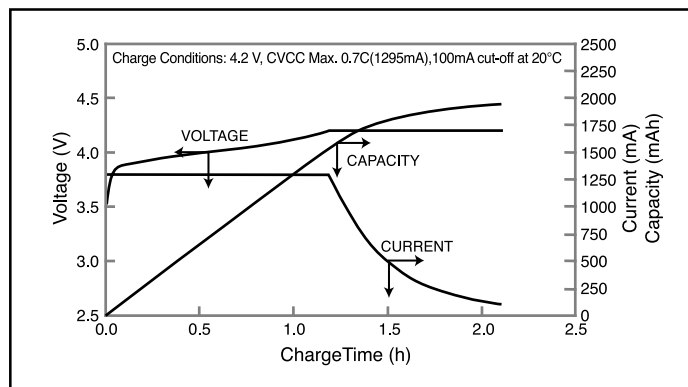

Cycle Life Characteristics

