


## Cell Type CR2/3 8-L Specifications

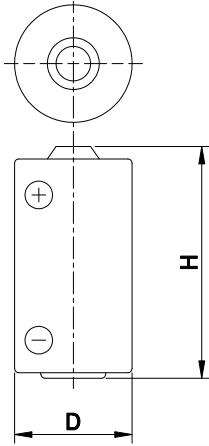


Nominal Voltage (V)		3
Nominal Capacity (mAh) *1		2000
Standard Discharge Current (mA)		0.1
Operating Temperature Range (°C) *2		-40 ~ +85
Max. Dimensions (mm)	Diameter (D)	17.0
	Height (H)	33.5
Weight (g)		15

\*1 Nominal capacity is determined at an end voltage of 2.0V when the battery is allowed to discharge at a standard current level at +23°C.


\*2 Consult FDK when using batteries at temperatures exceeding the -20°C to +60°C range.

### Typical Characteristics (Estimated Curve)


Temperature Characteristics of CR2/3 8-L

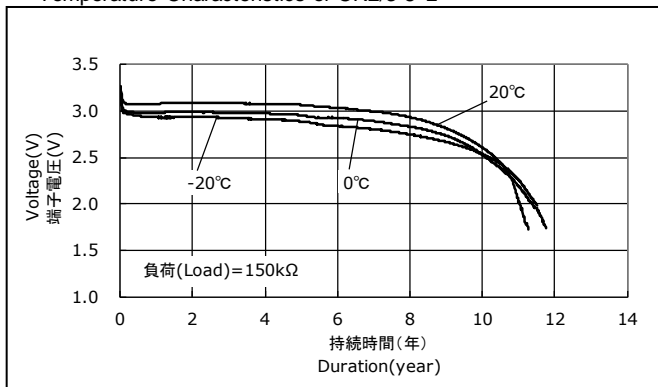


Temperature Characteristics of CR2/3 8-L

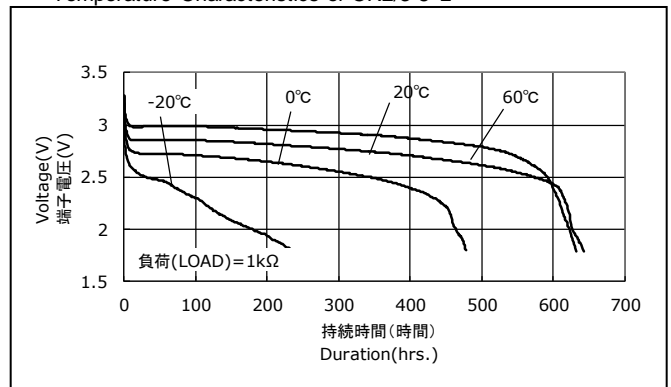

Pulse discharge Characteristics of CR2/3 8-L

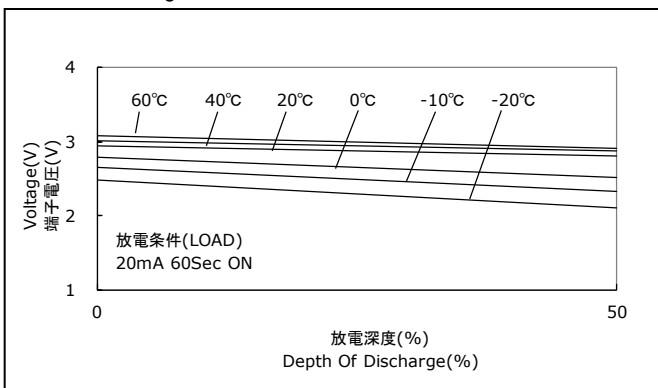

Discharge Load vs. Cell Capacity of CR2/3 8-L

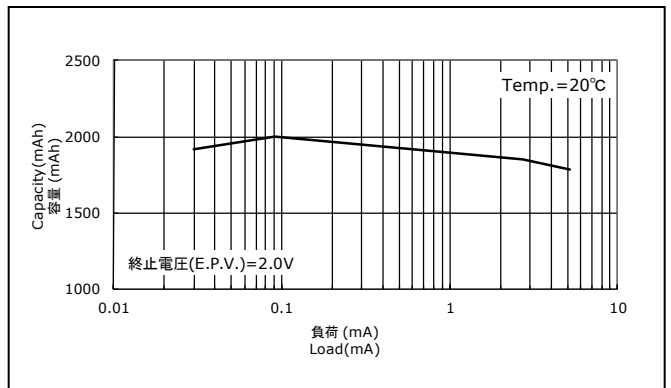

The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.