


New
BK250A
 A size (HR17/50)

Low temperature discharge type

L type

■ Dimensions (with tube)

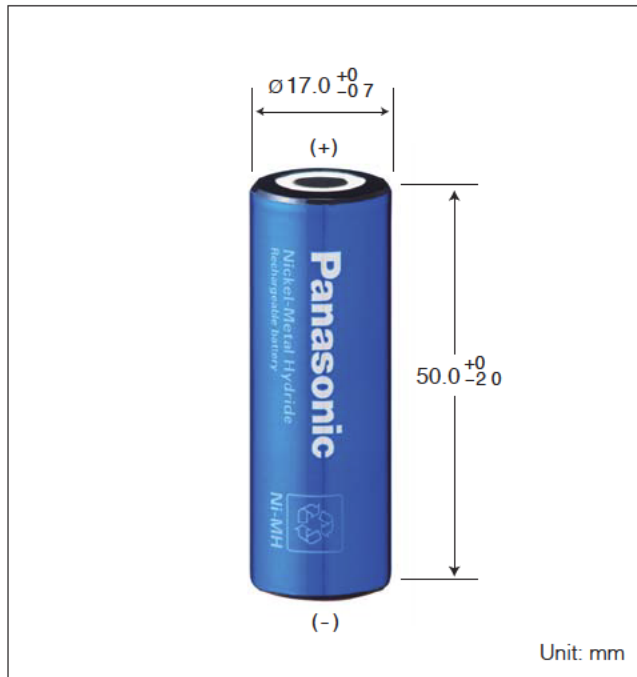


■ Specifications


Diameter		17.0 +0.0 / -0.7 mm	
Height		50.0 +0.0 / -2.0 mm	
Approximate Weight		37 g	
Nominal Voltage		1.2 V	
Discharge Capacity	Average ^{*1}	2600 mAh	
	Rated (min.)	2450 mAh	
Approx. Internal impedance at 1000Hz at charged state.		20 mΩ	
Charge	Standard	245 mA X 16 hrs.	
	Rapid ^{*3}	2450 mA X 1.2 hrs.	
Ambient Temperature	Charge	Standard	0 °C to 45 °C
		Rapid	0 °C to 40 °C
	Discharge		-30 °C to 65 °C
Storage	<1 year	-30 °C to 35 °C	
	<6 months	-30 °C to 45 °C	
	<1 month	-30 °C to 55 °C	

*1 After charging at 0.1 C for 16 hours discharging at 0.2 C
 *2 For reference only
 *3 Need specially designed control system. Please contact Panasonic for details

■ Typical charge characteristics

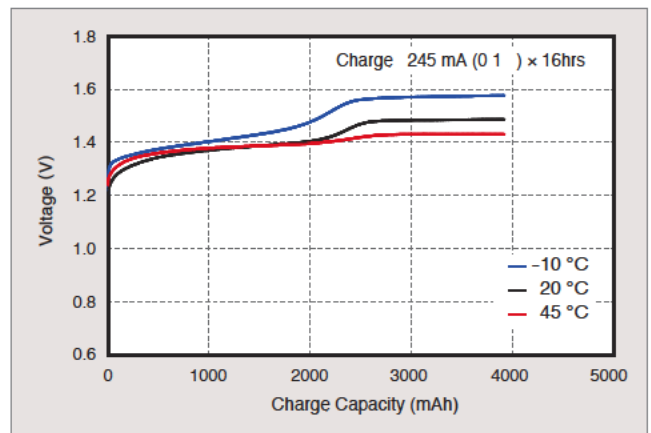

■ Typical discharge characteristics

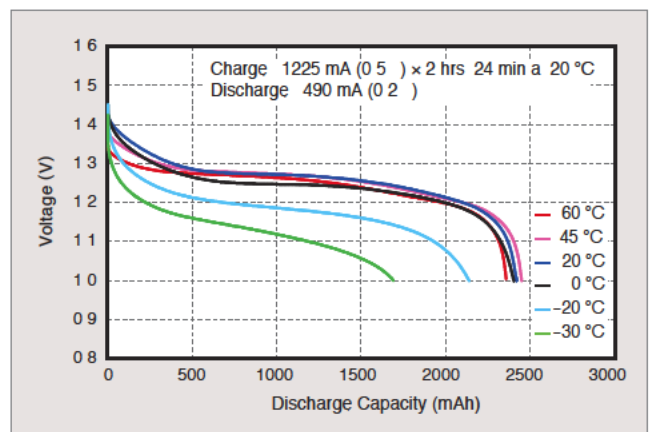

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

* The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.